

NICKEL-ZINC



ZincFive

The Power of Good Chemistry™

Monobloc Battery High Rate

80 Ah

90 Ah



Benefits of NiZn Technology

- ✓ **Superior Safety** – UL 9540A certified with no risk of thermal runaway
- ✓ **Reliable Chemistry** – NiZn chemistry fails conductive, allowing weak or depleted cells to continue to discharge
- ✓ **High Rate Applications** – Capable of >10C discharge and 2C recharge
- ✓ **Temperature Tolerant** – Wide operating temperature range

The Power of Good Chemistry™ works when you need it most

Powerful, recyclable, non-flammable, and compact, ZincFive's nickel-zinc monobloc batteries are optimal for a variety of stationary and industrial applications, including backup, grid operations support, and EV charger power buffering.



80 Ah
High-Rate





90 Ah
Ultra High-Rate



Specifications

Model	High-Rate Z5 13-80 H S F	Ultra High-Rate Z5 13-90 U S F
Electrical		
Nominal Voltage	13 Vdc	
Number of Cells per Battery	8 cells	
Operating Voltage Range	10 V - 15.2 V	
Nominal Capacity (1C rate)	≥80 Ah	≥90 Ah
Nominal Energy (1C rate)	1.0 kWh	1.2 kWh
Max Continuous Discharge Power (100% to 0% SoC)	8,000 W (>15 °C)	12,000 W (>15 °C)
Short Circuit Current	5,400 A	6,200 A
Charge Voltage	CC to 15.1 Vdc; CV until 4.0 A cutoff	CC to 15.04 Vdc; CV until 4.0 A cutoff
Charge Rate	20 A to 160 A	20 A to 180 A
Discharge Rate	40 A to 800 A	40 A to 1300 A
Impedance AC (1kHz)	≤2.5 mΩ	≤2.3 mΩ
Chemistry	Nickel-Zinc	
Electrolyte	Wet, Alkali Filled	
Lead Acid Equivalent at 80A Discharge (1C) Rate	Typical 250 Ah (C10)	
Environmental		
Operating Temperature Range	Charge: (0 °C to 50 °C) Discharge: (-20 °C to 45 °C)	
Storage Temperature Range	-20 °C to +50 °C	
Design Life	>15 years at 25 °C	
Mechanical		
Case Flame Rating	H S F and U S F = V-0	
Terminal	M6 x 1, 19.5 mm depth	
Terminal Torque (Initial and annual retorque)	Initial 10 N-m +/- 1 N-m [89 lbf-in +/- 8.9 lbf-in] Annual retorque should not exceed 10 N-m +/- 1 N-m [89 lbf-in +/- 8.9 lbf-in] Assuming Property Class stainless fasteners (i.e., A2-70) with a minimum yield strength of 450 MPa and adequate (min 8 mm / 0.31 in) thread engagement.	
Length (in/mm)	10.94 +/- 0.12 in / 278.0 +/- 3.0 mm	
Width (in/mm)	6.9 +/- 0.12 in / 175 +/- 3.0 mm	
Height (in/mm)	7.4 +/- 0.12 in / 188.0 +/- 3.0 mm	
Weight (lbs/kg)	34.2 +/- 1 lb / 15.5 +/- 0.5 kg	37.1 +/- 1 lb / 16.8 +/- 0.5 kg
Certifications		
Regulatory Approvals	UL 1989, CSA C22.2 No. 60950-1, ANSI/CAN/UL1973, CE, RoHS, EU 2023/1542	
UL 9540A	No thermal runaway exhibited at cell-level test	

All Specifications Valid at 25 °C Unless Otherwise Stated.
All Specifications Subject to Change

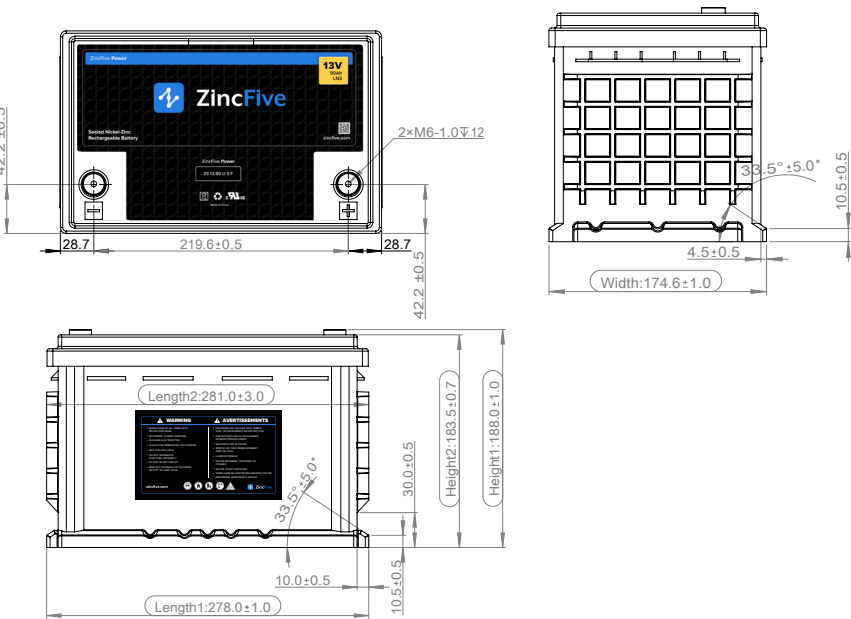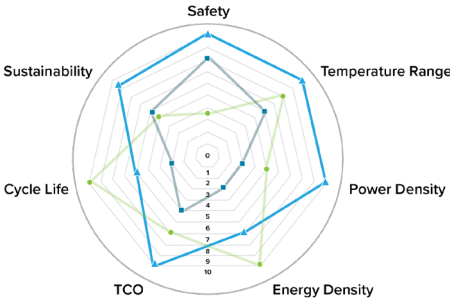

Immediate Power Solutions

Safe, reliable and sustainable short-duration high-rate power technologies for critical applications